
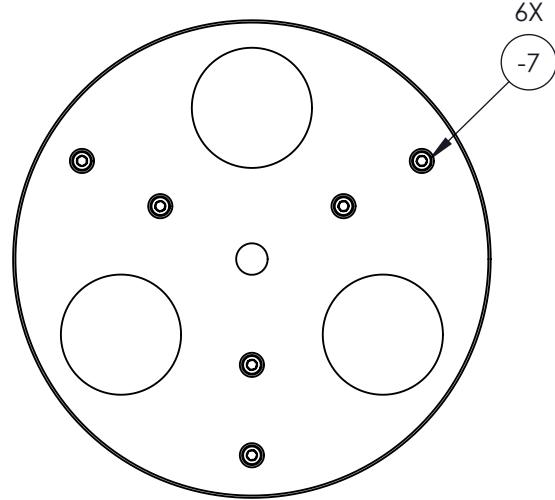
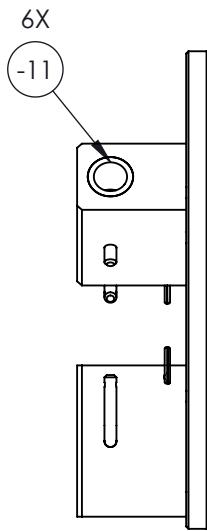


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		-1 ADDED ENGRAVE ASSY. T/N NOTE. -3 CH'D HOLE FROM Ø.3125 +.005-.000 TO Ø.3150 +.005-.001& CH'D P.F.-40 TO P.F.-11, CORRECTED ENGRAVE NOTE P/N. -5 CH'D MATERIAL OVERALL LENGTH, ADDED ISSING DIM.	1/20/2011	RJC	RW
1A		-9 DELETED FROM BOM, NOT USED.	5/24/2011	RJC	RW
2		-1 ADDED MISSING DIM. Ø.820 FOR HOLE IN CENTER.	7/8/2011	RJC	DW
3		-3 CH'D Ø.3125 TOLERANCE FROM +.005-.000 TO ±.001, ADDED MISSING DIMS TO LOCATE HOLES.	4/15/2013	CFS	GE

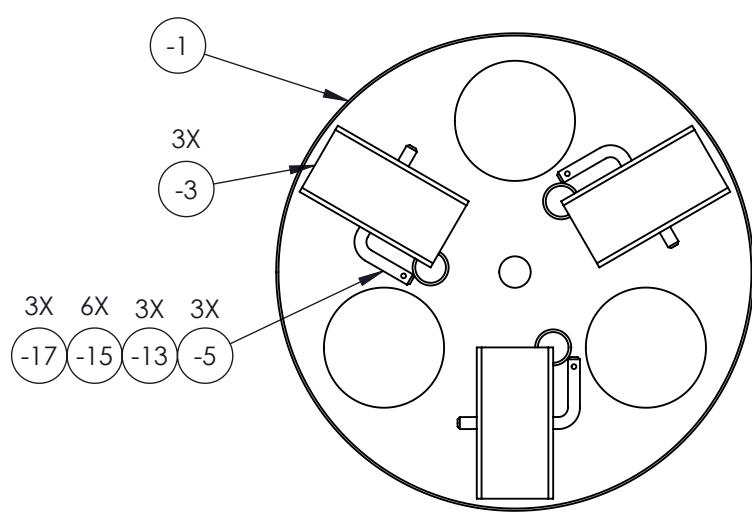

NOTE:



1. REF. AGUSTA T/N: 3G6205G11331.
2. PART OF KITS RBW6205G1231-3G AND RBW6205G13831-3G.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	PLATE	6061		2
			-3	3	BLOCK	6061		3
			-5	3	PIN	1018 G&P		4
B/O	-7	6	SOCKET HEAD CAP SCREW	STEEL	M8 X 1.25 X 25mm (MCMASTER-CARR #95263A633)			1
B/O	-11	6	BUSHING	STEEL	Ø22 mm I.D X Ø30mm O.D. X 36mm (MCMASTER-CARR #8486A78)			1
B/O	-13	3	SPLIT RING	STEEL	Ø.80 I.D. X Ø.07 WIRE (MCMASTER-CARR #86805T36)			1
B/O	-15	6	FERRULE	ALUMINUM	Ø1/16 X 3/8 MCMASTER-CARR #3896T31			1
B/O	-17	3	LANYARD CABLE	COATED STEEL	Ø1/16 X 6 (CARR LANE #CL-2-C)			1

DART AEROSPACE			
TITLE			REV
UPPER PLATE ASSEMBLY			3
DWG NO.	DRAWN BY: CLOUGH		
RBW6205G12731-3G			
MAT'L	APPROVED	D Weil	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
.XXX ± .005	FRACTIONS ± 1/8		
.XX ± .01	ANGLES ± 5°		
.X ± .1			
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R			
2. DIMENSIONAL LIMITS APPLY AFTER PLATING			
	USED ON MODEL		
	AGUSTA		
SCALE 1:5	DATE 4/30/2010		SHEET 1 OF 4

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.


REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		-1 ADDED ENGRAVE ASSY. T/N NOTE.	1/20/2011	RJC	RW
2		-1 ADDED MISSING DIM. Ø.820 FOR HOLE IN CENTER.	7/8/2011	RJC	DW

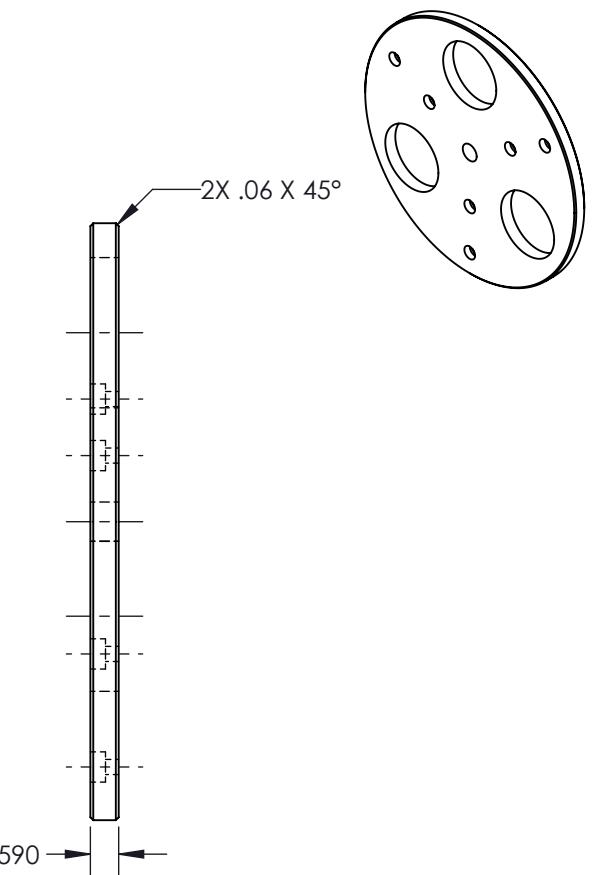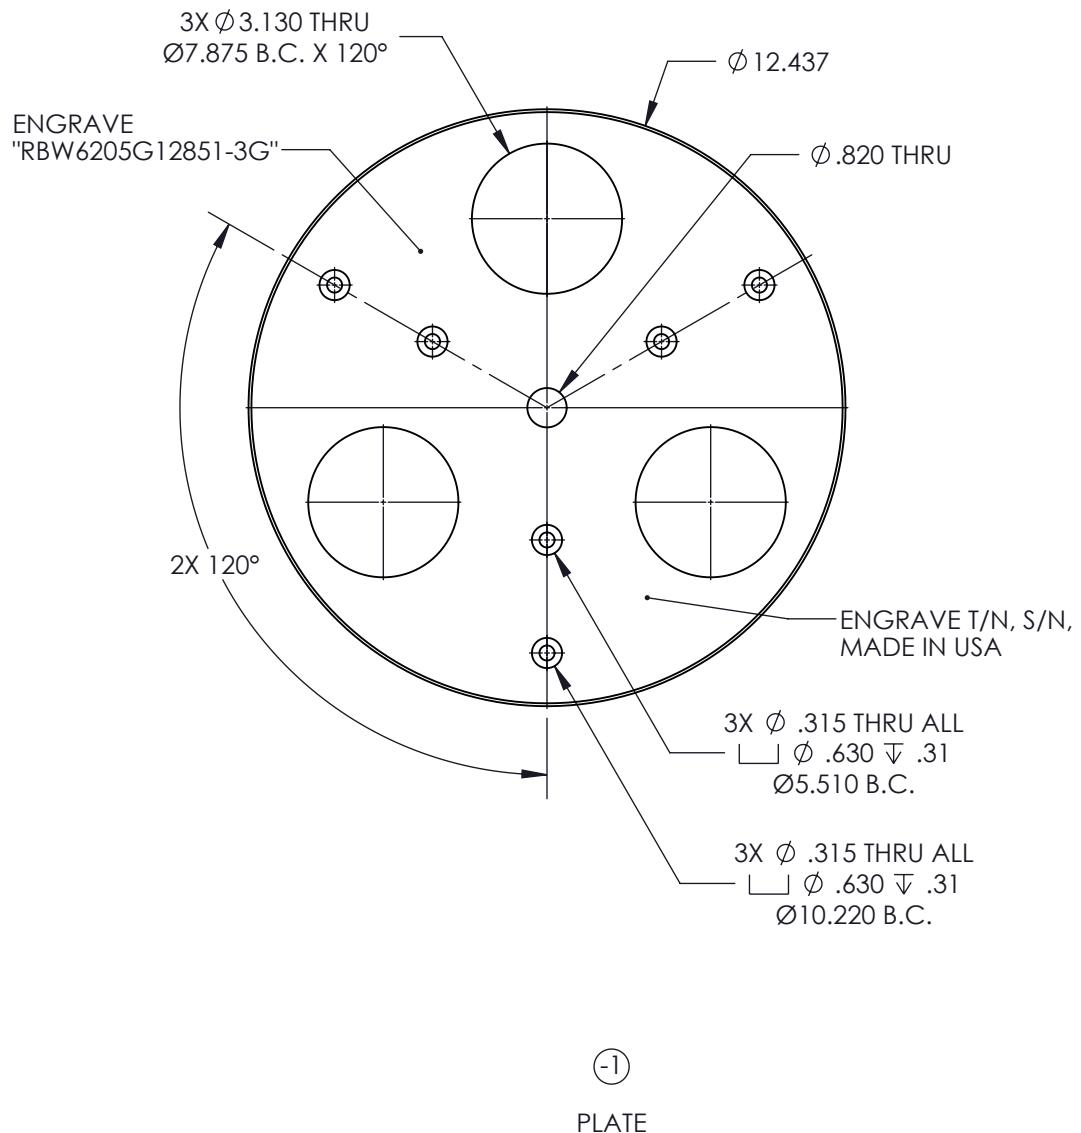


DART AEROSPACE	
TITLE	
UPPER PLATE ASSEMBLY	
DWG NO.	REV
RBW6205G12731-3G-1	3
MAT'L	DRAWN BY:
6061	CLOUGH
APPROVED	
D Weil	
UNLESS OTHERWISE SPECIFIED	
DIMENSIONS ARE IN INCHES	
.XXX ± .005 FRACTIONS ± 1/8	
.XX ± .01 ANGLES ± 5°	
.X ± .1	
1. BREAK ALL SHARP EDGES .015 x 45°	
OR .015R	
2. DIMENSIONAL LIMITS APPLY AFTER	
PLATING	
SPEC MIL-A-8625F, TYPE II, CLASS I	
USED ON MODEL	
AGUSTA	
SCALE	DATE
1:4	4/30/2010
SHEET 2 OF 4	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISONS		
REV	ECR	DESCRIPTION
1		-3 CH'D HOLE FROM Ø.3125 +.005-.000 TO Ø.3150 +.005-.001& CH'D P.F.-40 TO P.F.-11, CORRECTED ENGRAVE NOTE P/N.
3		-3 CH'D Ø.3125 TOLERANCE FROM +.005-.000 TO ±.001, ADDED MISSING DIMS TO LOCATE HOLES.

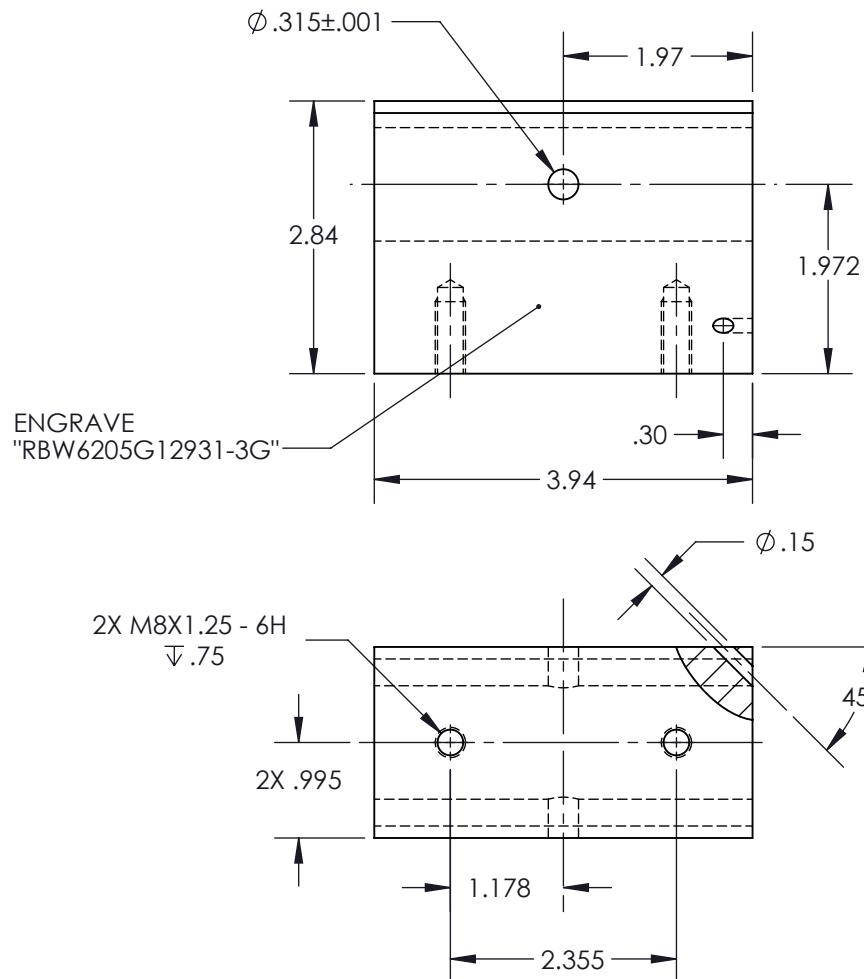


(3)
BLOCK

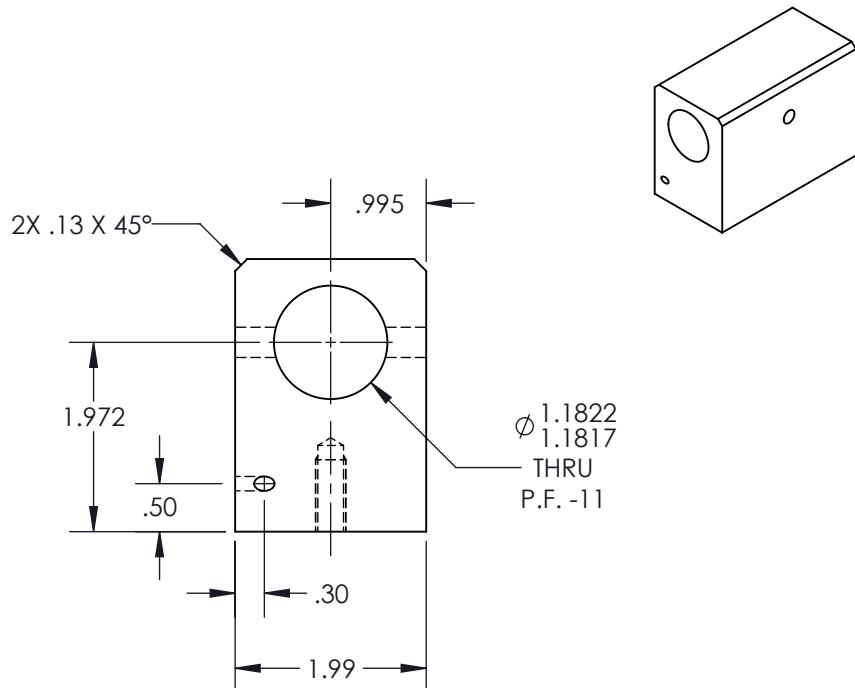

DART AEROSPACE	
TITLE	
DWG NO. RBW6205G12731-3G-3 REV 3	
MAT'L 6061	DRAWN BY: CLOUGH
UNLESS OTHERWISE SPECIFIED	
DIMENSIONS ARE IN INCHES	
.XXX ± .005	FRACTIONS ± 1/8
.XX ± .01	ANGLES ± 5°
X ± .1	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
SPEC MIL-A-8625F, TYPE II, CLASS I	
USED ON MODEL AGUSTA	
SCALE 1:2	DATE 4/30/2010
SHEET 3 OF 4	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		-5 CH'D MATERIAL OVERALL LENGTH, ADDED ISSING DIM.	1/20/2011	RJC	RW

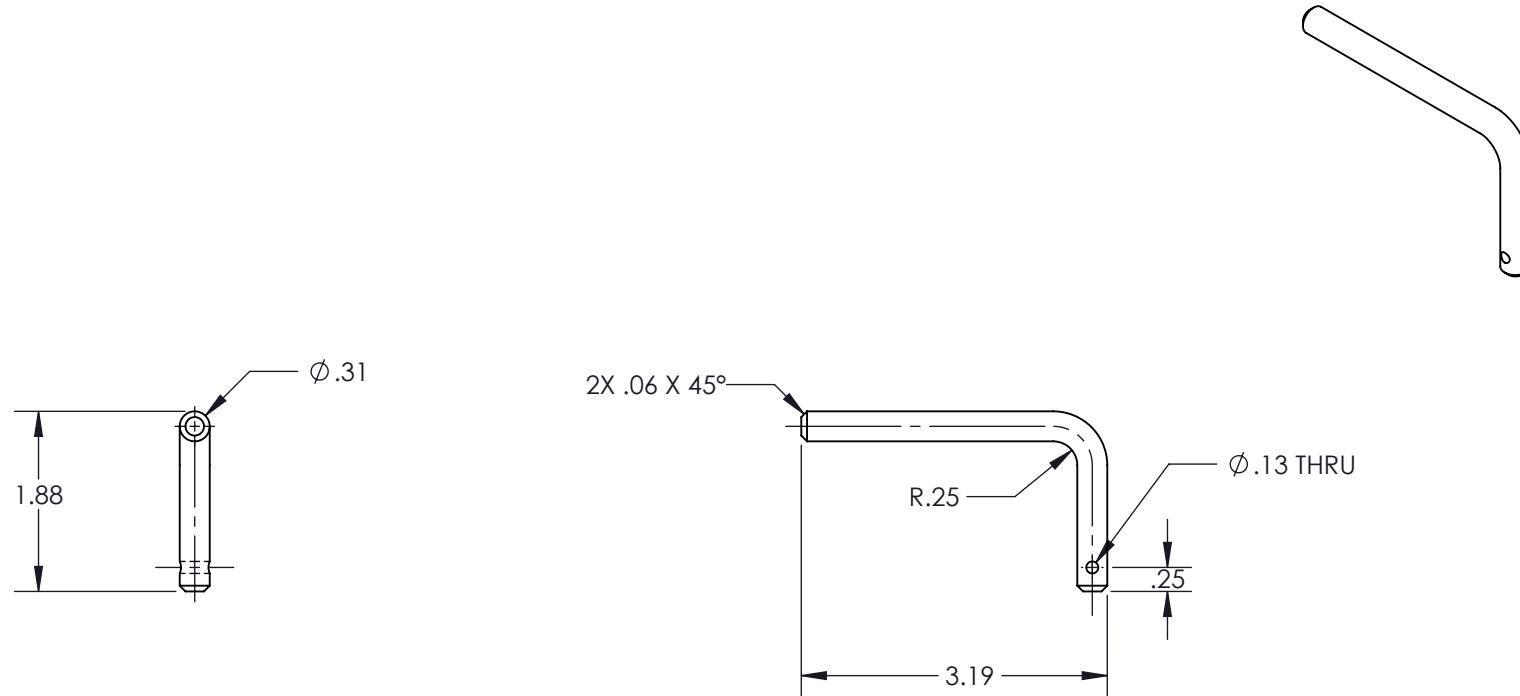

(-5)

PIN

DART AEROSPACE	
TITLE	UPPER PLATE ASSEMBLY
DWG NO.	RBW6205G12731-3G-5
MAT'L	DRAWN BY: CLOUGH 1018 G&P
UNLESS OTHERWISE SPECIFIED	APPROVED D Weil
DIMENSIONS ARE IN INCHES	
.XXX ± .005	FRACTIONS ± 1/8
.XX ± .01	ANGLES ± 5°
.X ± .1	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	HEAT TREAT CAD PLATE YELLOW
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	SPEC QQ-P-416F, TYPE II, CLASS II USED ON MODEL AGUSTA
SCALE 1:2	DATE 4/30/2010
	SHEET 4 OF 4